


CSA Approved For:  
Wet & Damp Locations (CPH515L)  
Wet Locations (CPH1525L)

Available in 500W Maximum & 1500W Maximum T-3 Quartz Halogen Lamp

### SPECIFICATIONS:

- Housing & Lens Frame constructed of die-cast aluminum. Lens frame mounted on floating hinge for easy lamp access. Standard finish is Duraplex II™ Bronze Electrostatic Powder coat.
- Lens is made of a high temperature, shock-resistant tempered glass lens, gasketed to lens frame for a weather-tight seal.
- Three piece anodized aluminum semi-specular reflector provides wide NEMA 5x5 general purpose light distribution.
- Mounting is an adjustable die-cast swivel arm with serrated locking washer for horizontal aiming; arm threaded 1/2" NPT. Cast-in angle markings on swivel and serrated teeth provide vertical aiming, locked into position.
- Lampholder is a recessed single contact for T-3 lamps. Socket is porcelain with high temperature silver plated contacts.
- Lamp must be operated in horizontal position (within 4°) to assure maximum lamp life. Fixture supplied complete with lamp.
- Comes with 3 year limited warranty.

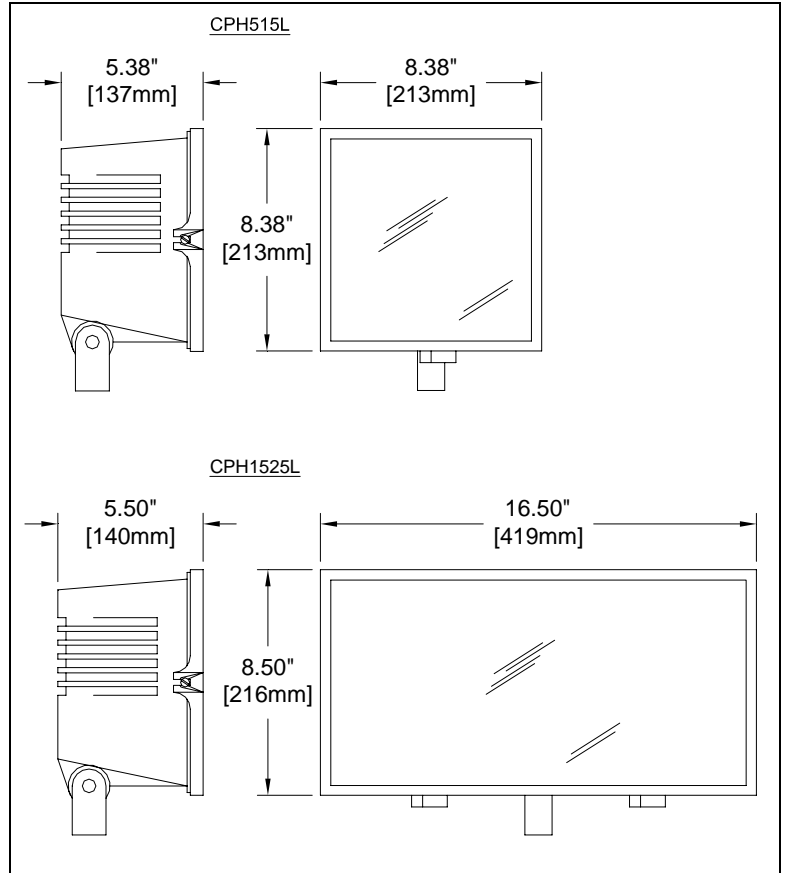

### ORDERING GUIDE:

Example: CPH1525L

Series	Lamp Wattage <sup>1</sup>	Lamp Included
CPH : Quartz Flood	515 : 500W Quartz 1525 : 1500W Quartz	L : Yes Blank : No

<sup>1</sup> 500W is 120V only, 1500W is 240V only.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_ CATALOGUE NUMBER: \_\_\_\_\_