






MOONRAY

- Ideal for outlining exterior of buildings
- Listed for wet location
- Lamps included
- Transformer sold separately

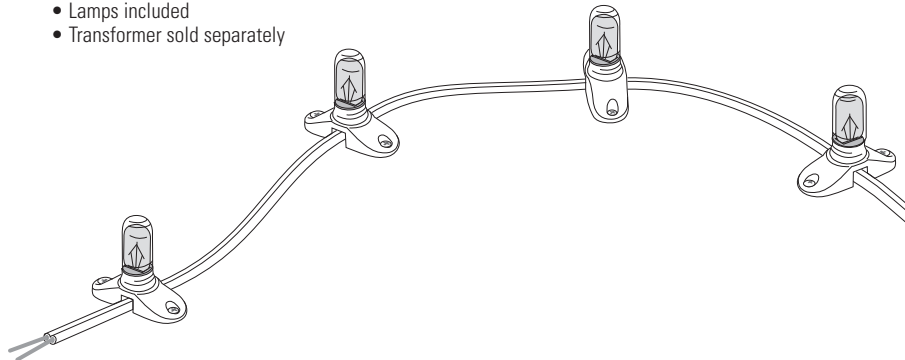

END VIEW

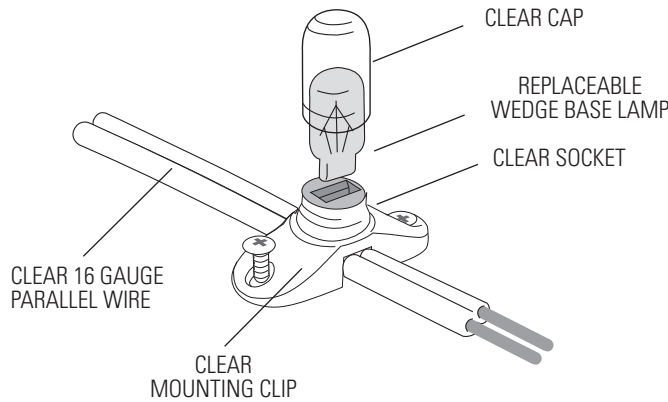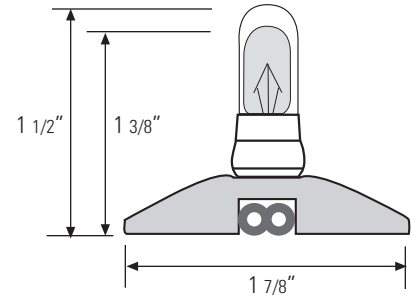

QUICK REFERENCE INSTALLATION INSTRUCTIONS

1. Place mounting clip onto surface and screw mount. Drill pilot holes if necessary.
2. Strip wire at beginning of run to make connections to power source. (Do not power until installation is complete)
3. Seal end of run and any connections with silicone or other moisture resistant sealant.

Do not exceed maximum run length per circuit. Lightstring is available in pre-cut sections or can be field cut.

MAX. RUN PER CIRCUIT (10 AMPS OR LESS)

LAMP TYPE	LAMP SPACING	
	6"	12"
A	130 FT.	200 FT.
B	65 FT.	130 FT.

•DRAWING NOT TO SCALE•

S P E C I F I C A T I O N S

PRODUCT CODE	LAMP		LAMP SPACING	
MRY	A	24 V 0.9W INCANDESCENT LAMP (20,000 HRS RATED LIFE)	6	6" ON CENTER
	B	24 V 1.8W INCANDESCENT LAMP (49,000 HRS RATED LIFE)	12	12" ON CENTER
				OR SPECIFY OTHER SPACING

EXAMPLE

MRY	A	6
-----	---	---

FILL OUT BELOW FOR SUBMITTAL

MRY		
-----	--	--

PROJECT NAME	SPECIFIER
FIXTURE SCHED. TYPE	CONTRACTOR
QUANTITY	DISTRIBUTOR
LENGTHS	REPRESENTATIVE



visit us at :
www.celestiallighting.com
e-mail :
info@celestiallighting.com

14009 Dinard Ave.
Santa Fe Springs,
CA 90670

PH (562)•802•8811
(800)•233•3563
FX (562)•802•2882