




LIGHTING STRIP WITH ASYMMETRIC REFLECTOR

ALS

FOR 32 W T8 FLUORESCENT LAMP

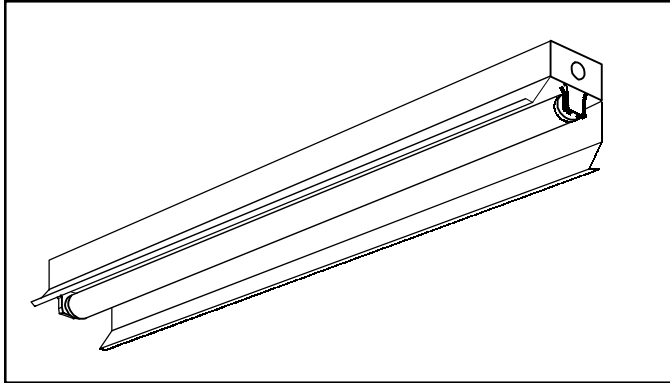

Date: _____
 Project Name: _____
 Fixture type: _____
 Cat. No: _____
 Volts: _____
 Ballast type: _____

Variants: _____

Specifications:


GENERAL: For surface installation a general utility lighting strip with reflector for asymmetric light distribution. Use as supplementary lighting in small work spaces, over a working bench or under shelving, etc.. Side reflector provides a visual cut-off from lamp glare.

HOUSING: Die formed from code gauge steel. Baked white enamel finish.

ELECTRICAL: Units are equipped with certified electronic ballast rated for 120 Vac, 60 Hz. Other ballasts are available on request. Medium bi-pin lampholders.

APPROVAL: Certified CSA and/or UL.

LENGHT	LAMPS	CAT. NO.	WEIGHT
48"	1-32 W / T8	ALS-4-132	4 Kg (8 lbs)
96"	2-32 W / T8 † † = (Tandem)	ALS-8-232	5 Kg (11lbs)

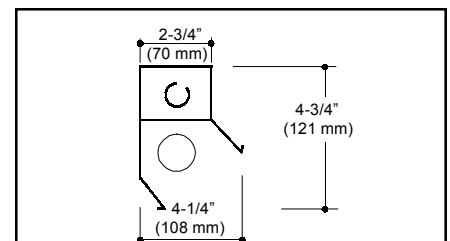


ORDERING GUIDE:
CAT.NO. + VOLTS

120
277
347

Example: ALS-4-132-120

Details:

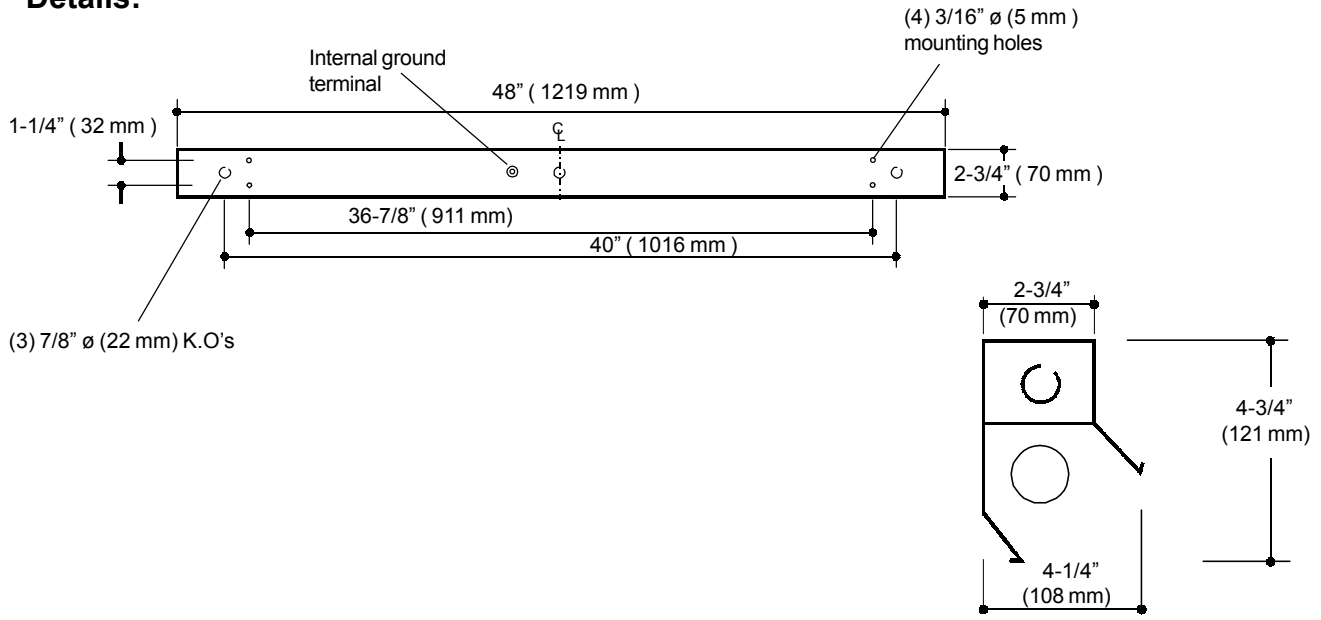

Photometric Data:

AVAILABLE ON REQUEST