

Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA
001 280-00- couleur

P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE

Job Name Here


Fixture Type Here

Ordering Information Here

280 SERIES • 120V • PAR30



This small, lightweight fixture is ideal for shops, exhibits, galleries and residences that require a short or medium throw.

- Designed for the Tungsten Halogen PAR30 and Halogen Infra-Red medium screw-base lamps up to 75 watts
- Sturdy aluminum housing
- Rugged steel self-locking yoke allows for horizontal and vertical focusing
- On/off safety switch (on most mounting types)
- Hinged front with relamping handle for easy lamp changing
- External multiple accessory clips accept all size A LSI filters and accessories
 - Integral dimmer is available
 - Finishes: LSI Black, White, Silver and Graphite
 - Fixture weight: 2.0 lbs.
 -  IBEW


MOUNTING OPTIONS

280-00

Lexan fitting for 1 and 2 circuit LSI Track. With On/Off switch.


280-00F

Same as above, with fuse.




280-2G

Universal fitting for Unistrut Systems and any screw or bolt-up applications. With switch, straight 6-foot 3-wire grounding cord and NEMA 5-15P plug.




280-3G

C-clamp for pipes from 5/8" to 2" O.D. With switch, straight 6-foot 3-wire grounding cord and NEMA 5-15P plug.




* 280-4G

Cushioned weighted base for floor or table use. With straight 6-foot 3-wire grounding cord and NEMA 5-15P plug.



280-5A

Canopy for permanent mounting on standard 4" octagonal outlet boxes.



Other Options (Consult Factory):

- Stems, specify length
- Custom color, RAL palette
- Emergency Fixture, add suffix **EF** (for use with 00 Track fitting only)

* Non-UL and Non-CUL


Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA
001 280-00- couleur

P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE

Job Name Here

Fixture Type Here

Ordering Information Here

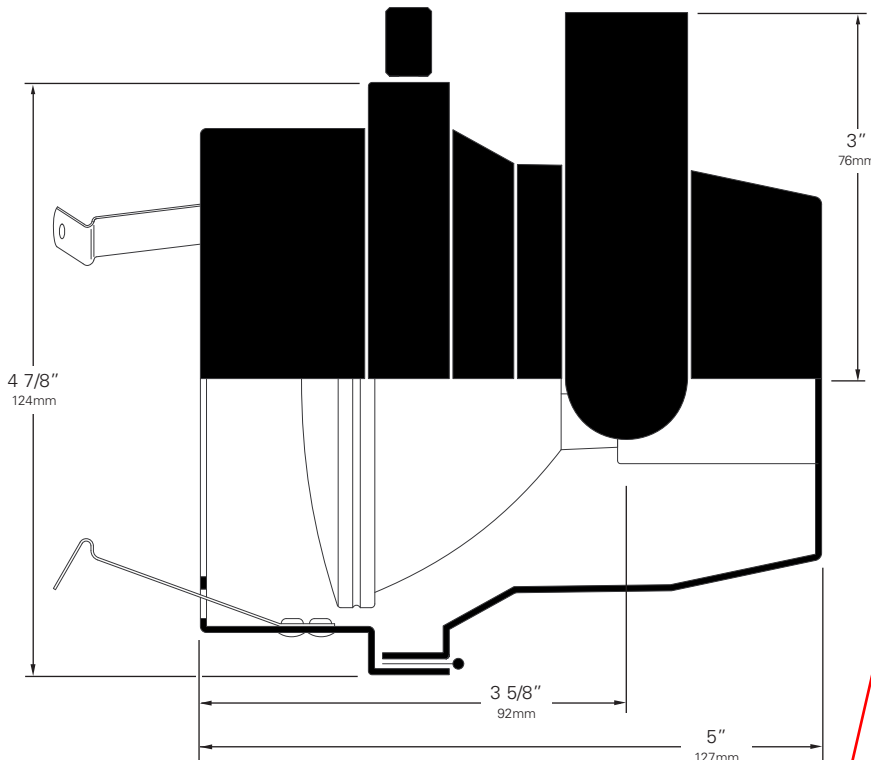

ORDERING INFORMATION

1. Select your **Mounting Option**.
2. Choose other fixture **Options** (add suffix):
 - For Coiled Cord, add **CC**
Coiled Cord is 18/3 105°C, 18" retracted, 6 foot extended. White fixtures are supplied with white cord, all other finishes are supplied with black cord. Available only with **2G**, **3G** and **4G** mounting options. (When a coiled cord is not specified, a straight cord is provided.)
 - For Wrench Locking, add **WL**
 - For Integral Dimmer, add **FD**

3. Choose a **Finish** for your fixture:
Black (**B**) White (**W**) Silver (**S**) Graphite (**G**)

Example: **280** - **2G** **CC** **WL** **FD** **B**
FIXTURE FITTING COILED CORD WRENCH LOCKING DIMMER FINISH

Blue fields are optional. Leave blank if not required.


4. Don't forget your **Accessories!**
LSI features the widest range of accessories in the industry to help you modify the light's intensity, color, texture and pattern.

PAR30 LAMPS

| Watts | Spread | CBCP | |
|-------|--------|-------|------------------|
| 50 | 9° | 13000 | 50PAR30/HIR/SP9 |
| 50 | 25° | 2700 | 50PAR30/HIR/FL25 |
| 50 | 35° | 1500 | 50PAR30/HIR/FL35 |
| 60 | 10° | 10000 | 60PAR30/H/SP10 |
| 60 | 25° | 2400 | 60PAR30/H/FL25 |
| 60 | 35° | 1700 | 60PAR30/H/FL35 |
| 75 | 10° | 13000 | 75PAR30/H/SP10 |
| 75 | 25° | 3100 | 75PAR30/H/FL25 |
| 75 | 35° | 2000 | 75PAR30/H/FL35 |

[Click for detailed photometrics](#)

ACCESSORIES



Barndoor A

4-way individually adjustable blades for control of light beam.

Other accessories:

- Hood A
- Louver A
- Cross Baffle A
- Delta Baffle A
- Glass Color Filters A
- Spread Lenses A990, A992, A995, A996
- Beam Softener A998
- Light Blocking Screens A801S, A802S, A803S
- OPTIVEX™ UV Filter A962

[Click for complete accessories and descriptions](#)

Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA
002 A962 UV filter Lens


P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE

Job Name:

Type:

Order Number:

Color Media

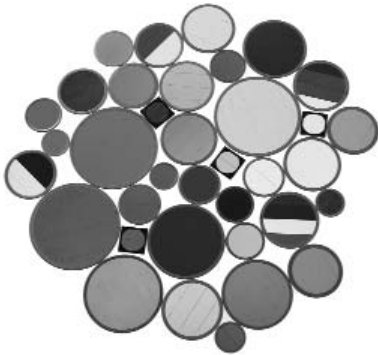

The LSI fade-free permanent glass color filters are rimmed in a seamless aluminum ring and are slotted for heat expansion. As the foremost innovator in accent lighting, LSI offers a complete range of permanent glass color filters which are available in nine stock diameters. In addition, LSI has available a Color Filter Sample Kit, Light Blocking Screens, OPTIVEX™ Glass UV Filters and Special Lenses. All are described in detail below.

Multicolor® Filters

Unique LSI four color glass filters create rich exciting blended color effects on all objects with brilliant four color fringed shadows on background.

No. Glass Colors Used

760 910/930/944/921
761 910/930/921/944
762 944/921/910/930
763 944/930/910/921
764 921/944/910/930

Duocolor® Filters

LSI two color glass filters blend to form one unique color that previously could only be achieved by using two separate color filters in the same fixture. Two color fringed shadows produced on background.

No. Glass Colors Used

770 910/944
771 910/921
772 910/930
773 944/933
774 921/930
775 930/933
776 910/948

Special Glass Color Filters

LSI will fabricate, on special order, glass color filters in most sizes and shapes.

FS4 – Color Filter Samples

To facilitate selection of glass color filters, LSI supplies a complete set of 1 3/4" X 1 3/4" labeled glass and dichroic samples in a handy carrying case.

1 Light Blocking Screens

Stainless steel mesh screens used alone or in combinations will block from approximately 20% to 90% of the transmitted light without changing the color temperature of the light.

No. % of Light Blocked

801S 20
802S 30
803S 40

2 962 OPTIVEX™ UV Blocking Filter

Eliminates ultra-violet wavelengths below 410±10nm. Especially useful for conservation of artworks and to help prevent fading.

960 Acrylic UV filter. Eliminates UV below 390±10nm. Available only for Fluorescent Series.

Notes:

- Figures vary based upon lamp being used and relationship of screen(s) to lamp and to each other.
- OPTIVEX™ glass is a trademark of Bausch & Lomb Inc.
- Some variation in color and thickness of glass can be expected.
- Values given are approximate due to slight variations in glass color and thickness.

Glass Color Filters

Size Diameter LSI Fixture Series

| | | |
|-----|--------|--|
| AAA | 2 3/8" | 216, 260, 261, LN16, MHLN16 |
| AA | 3" | 270, LN20, LN70, M2703, MHLN202, MHLN203 |
| A | 3 1/2" | 36, 46, 230, 231, 280, C16, C100, LN30, LN36, M1003, MHLN302, MHLN303, MHLN307 |
| B | 4 1/4" | C110, M1103, M1107, M2803, M2807 |
| C | 4 3/4" | 200, 236, 238, 239, 290, 297, GR38, LN38, M2907, M2901, MT603, MT607, MT615, SB36, TP36, TP38, TPM38, TPM111 |
| D | 5 1/2" | C150, C151, CP152, M1507, M1501 |
| E | 6 1/4" | 240, 300 |
| F | 7 1/4" | 500 |
| M | 2" Sq. | FOTH-75, FOTH-2/75, FOMH-150C, SB16, SB20, SB70 |

| ³ No. | Color | ⁴ % of Light Transmission |
|------------------|---------------------|--------------------------------------|
| 902 | Medium Pink | 36 |
| 903 | Deep Pink | 37 |
| 904 | Flesh Pink | 73 |
| 906 | Pale Lavender | 14 |
| 907 | Surprise Pink | 19 |
| 908 | Lilac | 21 |
| 910 | Warm Red | 10 |
| 911 | Strawberry | 6 |
| 912 | Ruby | 4 |
| 913 | Magenta | 1 |
| 914 | Light Amethyst | 25 |
| 915 | Medium Amethyst | 16 |
| 916 | Deep Amethyst | 4 |
| 917 | Olive | 18 |
| 918 | Light Green | 68 |
| 920 | Medium Green | 25 |
| 921 | Deep Green | 7 |
| 922 | Silver green | 65 |
| 923 | Yellow Green | 49 |
| 924 | Emerald Green | 12 |
| 925 | Light Turquoise | 68 |
| 926 | Medium Turquoise | 40 |
| 927 | Deep Turquoise | 17 |
| 928 | Light Blue | 34 |
| 930 | Medium Blue | 3 |
| 932 | Daylight | 59 |
| 933 | Gene Moore Blue | 18 |
| 936 | Grey | 56 |
| 937 | Light Blue Green | 17 |
| 939 | Light Amber | 68 |
| 940 | Medium Amber | 48 |
| 941 | Deep Amber | 43 |
| 942 | Straw | 78 |
| 943 | Gold | 87 |
| 944 | Canary Yellow | 84 |
| 945 | Lemon | 81 |
| 946 | Pumpkin | 32 |
| 947 | Tangerine | 20 |
| 948 | Orange | 23 |
| 949 | Pink Gold | 54 |
| 950 | Bronze | 48 |
| 951 | Brass | 11 |
| 952 | Autumn Tan | 11 |
| 953 | Leaf Brown | 19 |
| 954 | Butter Pecan | 3 |
| 955 | Toasted Almond | 1 |
| 962 | OPTIVEX™ UV Filter | 90 |
| 970 | Pyrex/Clear | 95 |
| 990 | Spread Lens/Clear | 83 (5°X 50°) |
| 991 | Anti-Heat/Clear | 83 |
| 992 | Spread Lens/Clear | 85 (5°X 30°) |
| 995 | Spread Lens/Clear | 83 (50°X 50°) |
| 996 | Spread Lens/Clear | 86 (45°X 50°) |
| 998 | Beam Softener/Clear | 80 (45°X 45°) |


Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA
003 AX- Barn Door

P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE

Job Name Here

Fixture Type Here

Ordering Information Here

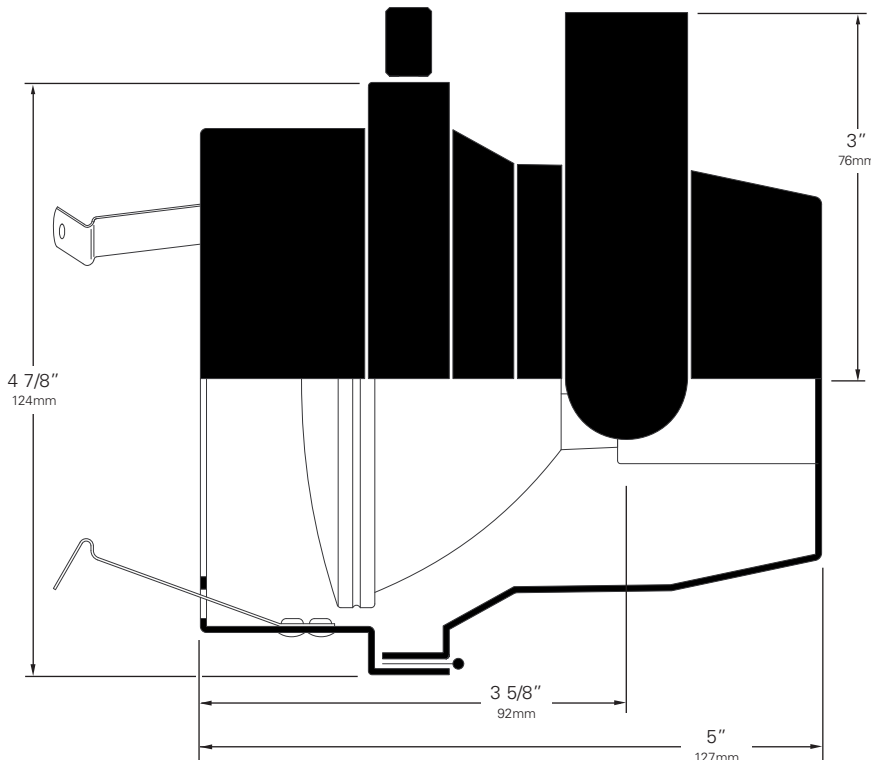

ORDERING INFORMATION


1. Select your **Mounting Option**.
2. Choose other fixture **Options** (add suffix):
 - For Coiled Cord, add **CC**
Coiled Cord is 18/3 105°C, 18" retracted, 6 foot extended. White fixtures are supplied with white cord, all other finishes are supplied with black cord. Available only with **2G**, **3G** and **4G** mounting options. (When a coiled cord is not specified, a straight cord is provided.)
 - For Wrench Locking, add **WL**
 - For Integral Dimmer, add **FD**
3. Choose a **Finish** for your fixture:
Black (**B**) White (**W**) Silver (**S**) Graphite (**G**)
Example: **280** – **2G** **CC** **WL** **FD** **B**
FIXTURE FITTING COILED CORD WRENCH LOCKING DIMMER FINISH
4. Don't forget your **Accessories!**
LSI features the widest range of accessories in the industry to help you modify the light's intensity, color, texture and pattern.

PAR30 LAMPS

| Watts | Spread | CBCP | |
|-------|--------|-------|------------------|
| 50 | 9° | 13000 | 50PAR30/HIR/SP9 |
| 50 | 25° | 2700 | 50PAR30/HIR/FL25 |
| 50 | 35° | 1500 | 50PAR30/HIR/FL35 |
| 60 | 10° | 10000 | 60PAR30/H/SP10 |
| 60 | 25° | 2400 | 60PAR30/H/FL25 |
| 60 | 35° | 1700 | 60PAR30/H/FL35 |
| 75 | 10° | 13000 | 75PAR30/H/SP10 |
| 75 | 25° | 3100 | 75PAR30/H/FL25 |
| 75 | 35° | 2000 | 75PAR30/H/FL35 |

[Click for detailed photometrics](#)

ACCESSORIES

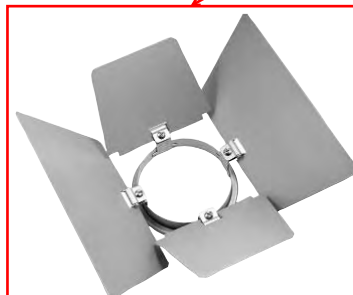

Barndoor A

4-way individually adjustable blades for control of light beam.

Other accessories:

- Hood A
- Louver A
- Cross Baffle A
- Delta Baffle A
- Glass Color Filters A
- Spread Lenses A990, A992, A995, A996
- Beam Softener A998
- Light Blocking Screens A801S, A802S, A803S
- OPTIVEX™ UV Filter A962

[Click for complete accessories and descriptions](#)



LA PASSION DE LA LUMIÈRE^{MC}

LUXTEC Québec
445 St-Jean-Baptiste Bureau 120
Québec, Canada
G2E 5N7

Téléphone : (418) 871-8039
Fax : (418) 871-0932
Sans frais : 1-800-463-5030
Site web : www.luxtec.ca

Dessin de LSI (Lighting Services Inc.)

Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA

P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE

004 Track 12' 1 circuit (coupable au chantier) 31230

120/250V SURFACE TRACK



Yale University Art Gallery
New Haven, CT

Lighting Design:
Fisher Marantz Stone

Exhibit Lighting Design:
Hefferan Partnership, Inc.

Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA

P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE

004 Track 12' 1 circuit (coupable au chantier) 31230

SURFACE TRACK (120/250V) • SPECIFICATIONS

GENERAL LightingTrack shall allow fixtures to be located anywhere along the track length. Fixtures shall be easily focused, switched, dimmed, accessorized and removed as desired. Track system shall have a ten year warranty from date of shipment.

MECHANICAL LightingTrack shall be constructed of .070 (2mm) extruded aluminum with overall height of 1.42 (36mm) and overall width of 1.812 (46mm). Track shall have same overall dimensions and physical appearance for both one and two circuit models.

Track shall be available in nominal 4 foot (1.2m), 8 foot (2.4m), and 12 foot (3.7m) lengths, in Silver, Black, White, or Graphite high temperature baked paint finish. Track shall be field cuttable to any length with a single cut.

Track system shall be available with End Feed, End Cap, Straight Mini-Joiner, Straight Joiner/Feeder, Flexible Joiner and L, T, and X Joiner/Feeders as standard components.

Track shall have the ability to be directly surface mounted. Track shall have pre-punched mounting slots for direct mounting to any surface. Track shall have the ability to: be mounted 1/2 inch (13mm) from a surface by extruded aluminum mounting clips, be suspended from a surface by a field cuttable stainless steel cable system, be suspended from a surface by a field cuttable steel stem system, and be mounted into UniTrack housing.


ELECTRICAL LightingTrack and components shall be UL and CUL listed, CE Certified, and comply with the National Electric Code standards for LightingTrack. One and two circuit LightingTrack shall be rated at 120/250 volt, 50/60 Hz. 2400 watts maximum each circuit. Each 20 amp/120 volt circuit shall be comprised of flat copper busbars and have a separate neutral busbar for each circuit busbar. The neutral busbar shall be oversized to be comparable to #10 gauge 30 amp wire to reduce the possibility of overheating due to non-linear loads and harmonics. **Track shall have integral wiring channels for six (6) additional #12 THHN wires to create three (3) additional 20 amp/120 volt circuits, which can be dropped into any Joiner/Feeder, for a total track power capacity of 100 amps.** A separate grounding busbar shall be integral in all track lengths. All busbars shall be insulated to prevent contact with aluminum extrusion.

Track shall have electric feed capability through all Joiner/Feeders (except Flexible Joiner and Straight Mini-Joiner) using either 1/2 or 3/4 U.S. trade size knock-outs (.875 diameter [22mm] or 1.125 diameter [29mm]). Joiner/Feeders can be electrically field modified by removing the Lexan™ cover and rerouting internal pre-wired jumpers. All Joiner/Feeders shall be available in Black, White, Silver, and Graphite GE fiber reinforced Lexan™.


One and two circuit LightingTrack with separate neutral busbars shall have the ability to have each circuit separately dimmed as required when using standard voltage and low voltage fixtures with either magnetic or electronic transformers. Track shall have the ability to be dimmed or switched in selected sections in addition to dimming or switching an entire track configuration or track run.

FIXTURE FITTING INTERFACE Track shall accept GE fiber reinforced Lexan™ fixture fittings which positively lock into track and cannot be energized by the integral switch until safety interlock handle is in the closed position. Safety interlock shall also prevent fixture fitting removal from track unless the switch is in the "off" position. Upon insertion of fixture fitting into track, grounding connection from fixture fitting to track shall be automatically completed before any electrical contact is made with busbars. When removing fixture fitting from track, the grounding connection shall automatically be disconnected last. The fixture fitting shall recess into the track, creating a minimal profile below the track. Fixture fittings for magnetic low voltage fixtures shall be furnished with fuse of the correct ampere rating for integral transformer protection, and shall not be fused as a branch circuit.

One Ckt 120/250V Track

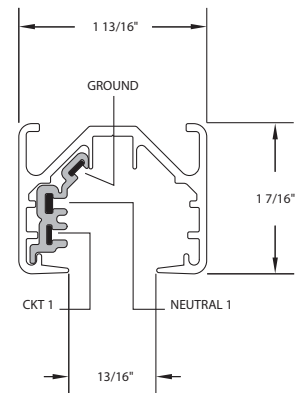

Two Ckt 120/250V Track

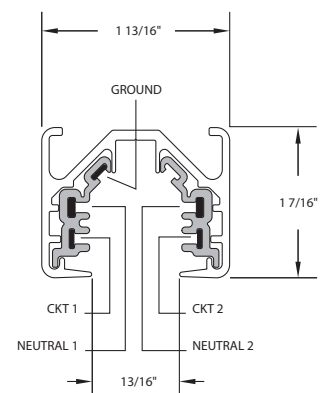


Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA

P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE


004 Track 12' 1 circuit (coupable au chantier) 31230

SURFACE TRACK (120/250V) • CONFIGURATIONS


Bridge Track Application

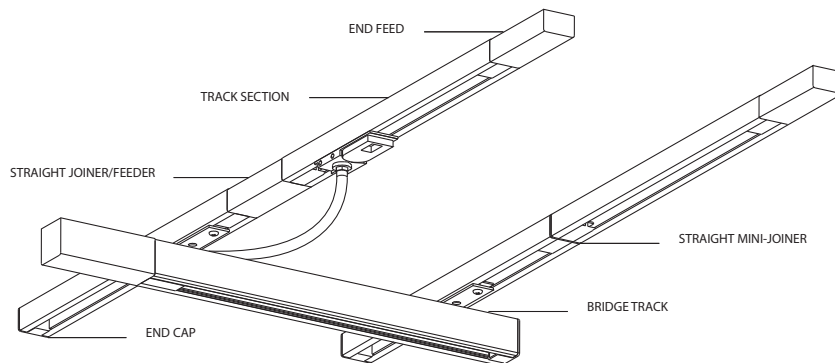


Ceiling Application/Horizontal Mount

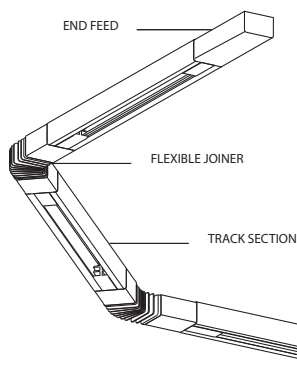

Ceiling to Wall Application/Vertical Mount

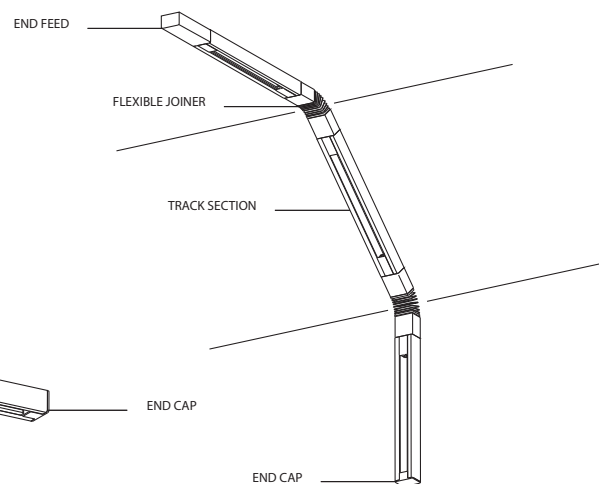

One Circuit Configuration

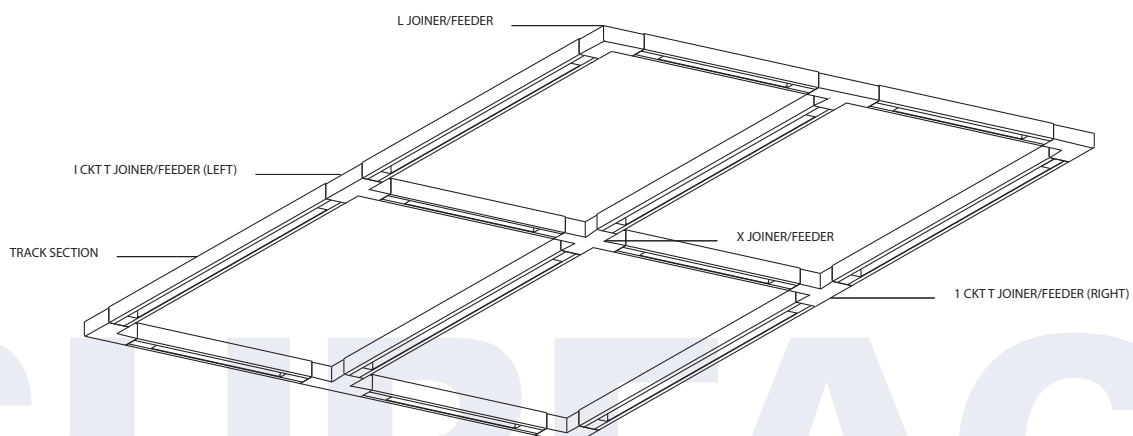

Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA
004 Track 12' 1 circuit (coupable au chantier) 31230

P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE

Job Name Here

Component Type Here


Ordering Information Here

SURFACE TRACK (120/250V) • COMPONENTS

Key Features / Applications

UL and CUL listed, CE Certified, Dry Location • IBEW union made at LSI plant in USA • Specification grade heavy duty .070 (2mm) extruded aluminum track • 4 foot (1.2m), 8 foot (2.4m) and 12 foot (3.7m) field cuttable lengths • One circuit 20 amp or two circuit 40 amp capacity/120/250 volt • 100 amp total capacity when using integral wireways • Copper busbars equivalent to #12 AWG wire used as circuit and ground track conductors • Oversized copper busbars equivalent to #10 AWG wire used as neutral track conductors • Separate neutral track conductor used for each circuit • Separate copper grounding busbar used throughout track system • Black, White, Silver, and Graphite finishes • All Joiner/Feeders, Flexible Joiners, Mini-Joiners, End Feeds and End Caps are injection molded of GE fiber reinforced Lexan™ • All Joiner/Feeders and Flexible Joiners are prewired and simply couple into track • All Joiner/Feeder circuits can be easily field modified by changing internal jumper wires • Fixture fitting recesses into track for minimum profile • LSI surface track can be mounted directly to any surface 5'-0" above finished floor.


Surface Track Sections



120/250V Surface Track Sections are used in conjunction with an End Feed, End Cap and a variety of Joiner/Feeders to form track runs and configurations. Track Section lengths are nominal 4 foot (1.2m), 8 foot (2.4m) and 12 foot (3.7m) which are field cuttable.

| Finish | | Nominal Length | | |
|----------|---------|----------------|-------|-------|
| | | 4 ft | 8 ft | 12 ft |
| Silver | One Ckt | 31010 | 31020 | 31030 |
| | Two Ckt | 32010 | 32020 | 32030 |
| Black | One Ckt | 31210 | 31220 | 31230 |
| | Two Ckt | 32210 | 32220 | 32230 |
| White | One Ckt | 31310 | 31320 | 31330 |
| | Two Ckt | 32310 | 32320 | 32330 |
| Graphite | One Ckt | 31410 | 31420 | 31430 |
| | Two Ckt | 32410 | 32420 | 32430 |


Bridge Track



120/250V Bridge Track is a complete, portable, field cuttable, surface UniTrack system that mechanically and electrically mounts to and spans parallel runs of LSI Track. Bridge Track provides an additional range of striking angles for track lighting fixtures or for centering a fixture over a target located between parallel runs of track up to 8 foot (2.4m) on center.

| Finish | | 9 ft |
|----------|---------|-------|
| Silver | One Ckt | 31025 |
| Black | One Ckt | 31225 |
| White | One Ckt | 31325 |
| Graphite | One Ckt | 31425 |


Emergency/Worklite Track



120/250V Emergency/Worklite Track is a separately fed one circuit Track Section, suitable for most LSI track fixtures, that integrates into any LSI Track run or configuration at any location. Consult fixture cutsheet. LSI fixtures (add suffix EF) mechanically lock into Emergency/Worklite Track by means of special hardware and do not have on/off switches.

| Finish | All One Ckt | | | |
|----------|--------------------|----------------------|---------------------|------------------------------|
| | 15" Joiner Section | 15" End Feed Section | 15" End Cap Section | 15" Conduit End Feed Section |
| Silver | 31050 | 31051 | 31052 | 31053 |
| Black | 31250 | 31251 | 31252 | 31253 |
| White | 31350 | 31351 | 31352 | 31353 |
| Graphite | 31450 | 31451 | 31452 | 31453 |


Unimount



120/250V Unimount is a compact canopy mount Track section which will accept most single LSI Track fixtures up to 500 watts.

| Finish | | |
|----------|---------|-------|
| Silver | One Ckt | 31161 |
| Black | One Ckt | 31261 |
| White | One Ckt | 31361 |
| Graphite | One Ckt | 31461 |

End Feed



120/250V End Feed is used in conjunction with a Canopy Kit for top feeding from a recessed outlet box and can also be top fed directly with cable.

| Finish | | |
|----------|---------|-------|
| Silver | One Ckt | 31100 |
| | Two Ckt | 32100 |
| Black | One Ckt | 31200 |
| | Two Ckt | 32200 |
| White | One Ckt | 31300 |
| | Two Ckt | 32300 |
| Graphite | One Ckt | 31400 |
| | Two Ckt | 32400 |

Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA
005 31200 End feed

P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE

Job Name Here

Component Type Here


Ordering Information Here

SURFACE TRACK (120/250V) • COMPONENTS

Key Features / Applications

UL and CUL listed, CE Certified, Dry Location • IBEW union made at LSI plant in USA • Specification grade heavy duty .070 (2mm) extruded aluminum track • 4 foot (1.2m), 8 foot (2.4m) and 12 foot (3.7m) field cuttable lengths • One circuit 20 amp or two circuit 40 amp capacity/120/250 volt • 100 amp total capacity when using integral wireways • Copper busbars equivalent to #12 AWG wire used as circuit and ground track conductors • Oversized copper busbars equivalent to #10 AWG wire used as neutral track conductors • Separate neutral track conductor used for each circuit • Separate copper grounding busbar used throughout track system • Black, White, Silver, and Graphite finishes • All Joiner/Feeders, Flexible Joiners, Mini-Joiners, End Feeds and End Caps are injection molded of GE fiber reinforced Lexan™ • All Joiner/Feeders and Flexible Joiners are prewired and simply couple into track • All Joiner/Feeder circuits can be easily field modified by changing internal jumper wires • Fixture fitting recesses into track for minimum profile • LSI surface track can be mounted directly to any surface 5'-0" above finished floor.


Surface Track Sections



120/250V Surface Track Sections are used in conjunction with an End Feed, End Cap and a variety of Joiner/Feeders to form track runs and configurations. Track Section lengths are nominal 4 foot (1.2m), 8 foot (2.4m) and 12 foot (3.7m) which are field cuttable.

| Finish | | Nominal Length | | |
|----------|---------|----------------|-------|-------|
| | | 4 ft | 8 ft | 12 ft |
| Silver | One Ckt | 31010 | 31020 | 31030 |
| | Two Ckt | 32010 | 32020 | 32030 |
| Black | One Ckt | 31210 | 31220 | 31230 |
| | Two Ckt | 32210 | 32220 | 32230 |
| White | One Ckt | 31310 | 31320 | 31330 |
| | Two Ckt | 32310 | 32320 | 32330 |
| Graphite | One Ckt | 31410 | 31420 | 31430 |
| | Two Ckt | 32410 | 32420 | 32430 |


Bridge Track



120/250V Bridge Track is a complete, portable, field cuttable, surface UniTrack system that mechanically and electrically mounts to and spans parallel runs of LSI Track. Bridge Track provides an additional range of striking angles for track lighting fixtures or for centering a fixture over a target located between parallel runs of track up to 8 foot (2.4m) on center.

| Finish | | 9 ft |
|----------|---------|-------|
| Silver | One Ckt | 31025 |
| Black | One Ckt | 31225 |
| White | One Ckt | 31325 |
| Graphite | One Ckt | 31425 |


Emergency/Worklite Track



120/250V Emergency/Worklite Track is a separately fed one circuit Track Section, suitable for most LSI track fixtures, that integrates into any LSI Track run or configuration at any location. Consult fixture cutsheet. LSI fixtures (add suffix EF) mechanically lock into Emergency/Worklite Track by means of special hardware and do not have on/off switches.

| Finish | All One Ckt | | | |
|----------|--------------------|----------------------|---------------------|------------------------------|
| | 15" Joiner Section | 15" End Feed Section | 15" End Cap Section | 15" Conduit End Feed Section |
| Silver | 31050 | 31051 | 31052 | 31053 |
| Black | 31250 | 31251 | 31252 | 31253 |
| White | 31350 | 31351 | 31352 | 31353 |
| Graphite | 31450 | 31451 | 31452 | 31453 |


Unimount



120/250V Unimount is a compact canopy mount Track section which will accept most single LSI Track fixtures up to 500 watts.

| Finish | | |
|----------|---------|-------|
| Silver | One Ckt | 31161 |
| Black | One Ckt | 31261 |
| White | One Ckt | 31361 |
| Graphite | One Ckt | 31461 |

End Feed



120/250V End Feed is used in conjunction with a Canopy Kit for top feeding from a recessed outlet box and can also be top fed directly with cable.

| Finish | | |
|----------|---------|-------|
| Silver | One Ckt | 31100 |
| | Two Ckt | 32100 |
| Black | One Ckt | 31200 |
| | Two Ckt | 32200 |
| White | One Ckt | 31300 |
| | Two Ckt | 32300 |
| Graphite | One Ckt | 31400 |
| | Two Ckt | 32400 |

Projet : Salle spectacle Dolbeau-Mistassini
Distributeur : GUILLEVIN CHICOUTIMI
Architecte : Paul Laurendeau Architecte
Ingénieur : ROCHE Les consultants RSA
006 End Cap 30203

P.O. Dist. : 2009-DA922989S
Entrepreneur : RODRIGUE PIQUETTE


Job Name Here

Component Type Here

Ordering Information Here

SURFACE TRACK (120/250V) • COMPONENTS

X Joiner/Feeder




5 3/16"

120/250V X Joiner/Feeder is used to mechanically and electrically couple any four lengths of surface track in an X configuration. This X Joiner/Feeder can also be top fed to energize the track from a recessed outlet box when used in conjunction with appropriate Canopy Kit or can be top fed directly with cable.

| Finish | | | |
|----------|---------|-------|---------------|
| Silver | One Ckt | 31109 | Two Ckt 32109 |
| Black | One Ckt | 31209 | Two Ckt 32209 |
| White | One Ckt | 31309 | Two Ckt 32309 |
| Graphite | One Ckt | 31409 | Two Ckt 32409 |

Flexible Joiner



7 1/8"

120/250V Flexible Joiner is used to mechanically and electrically couple any two lengths of surface mount track to create angles from 0° (straight) through 90° (right angle). The Flexible Joiner can be flexed in either horizontal or vertical planes. Not for use as feeder.

| Finish | | | |
|----------|---------|-------|---------------|
| Silver | One Ckt | 31112 | Two Ckt 32112 |
| Black | One Ckt | 31212 | Two Ckt 32212 |
| White | One Ckt | 31312 | Two Ckt 32312 |
| Graphite | One Ckt | 31412 | Two Ckt 32412 |

End Cap




1/8"

120/250V End Cap is used for mechanically ending any straight run, individual Track Section, or open configuration Track Section.

| Finish | | | |
|----------|---------------|-------|--|
| Silver | One & Two Ckt | 30103 | |
| Black | One & Two Ckt | 30203 | |
| White | One & Two Ckt | 30303 | |
| Graphite | One & Two Ckt | 30403 | |

Current Limiter



8 9/16"

LSI Track Current Limiters integrate directly into single circuit runs, available in the following amperages: 3 AMP (360 Watts); 5 AMP (600 Watts); 8 AMP (960 Watts); 12 AMP (1440 Watts).

| Finish | 3 AMP | 5 AMP | 8 AMP | 12 AMP |
|----------|-------|-------|-------|--------|
| Silver | TCL3S | TCL5S | TCL8S | TCL12S |
| Black | TCL3B | TCL5B | TCL8B | TCL12B |
| White | TCL3W | TCL5W | TCL8W | TCL12W |
| Graphite | TCL3G | TCL5G | TCL8G | TCL12G |

Adjustable Angle Bracket




5 1/4"

The Adjustable Angle Bracket for Flex Joiner is designed to attach to cable mounted track. This assembly locks the set angle of a Flex Joiner when there is no rigid mounting means.

| Finish | | | |
|----------|---------------|-------|--|
| Silver | One & Two Ckt | 30116 | |
| Black | One & Two Ckt | 30216 | |
| White | One & Two Ckt | 30316 | |
| Graphite | One & Two Ckt | 30416 | |

Raceway Cover


3'- 6 3/4"
7'- 6 3/4"
11'- 6 3/4"



Field cuttable Raceway Covers are used to enclose additional lay-in circuit wiring in top section of track.

| Nominal Length | | | |
|----------------|-------|-------|-------|
| Finish | 4 Ft | 8 Ft | 12 Ft |
| Galvanized | 30613 | 30614 | 30615 |

Track U-Ground Outlet



5"

120/250V Track U-Ground Outlet provides a convenient switched and fused U-Ground receptacle for power and is rated at 5A-120V. Non-UL listed.

| Finish | | | |
|----------|---------------|-------|--|
| Silver | One & Two Ckt | 31160 | |
| Black | One & Two Ckt | 31260 | |
| White | One & Two Ckt | 31360 | |
| Graphite | One & Two Ckt | 31460 | |


Display Hook



Display Hook is used to mechanically hang an item from the track without electrifying it. Do not exceed 20 lbs. at minimum spacing of two feet.

| Finish | | | |
|--------|---------------|-------|--|
| Silver | One & Two Ckt | 30761 | |

Weight Support Bar



4 7/8"

Weight Support Bar provides threaded nipple and nuts to mount an item to track without electrifying it. Do not exceed 20 lbs. at minimum spacing of two feet. Nipple size 1/8-27 NPS (.406 diameter).

| Finish | | | |
|--------|---------------|-------|--|
| Silver | One & Two Ckt | 30762 | |

Track Closure Cover

3'- 4"
7'- 4"
11'- 4"



Field cuttable Noryl Track Closure Covers are used to enclose the open face of the track, and simply snap into place.

| Nominal Length | | | |
|----------------|-------|-------|-------|
| Finish | 4 Ft | 8 Ft | 12 Ft |
| Silver | 30165 | 30166 | 30167 |
| Black | 30265 | 30266 | 30267 |
| White | 30365 | 30366 | 30367 |
| Graphite | 30465 | 30466 | 30467 |